

GRK Caliburn XL





| PART # | SIZE | Head diameter (dk) | Head height (H) | Length (L) | Thread length (TL) | Shank diameter (ds) | Minor diameter (d1) | Major diameter (d2) |
|-------------|-----------------|-----------------------|--------------------|------------|--------------------|------------------------|------------------------|------------------------|
| 57774 | 19/64" X 2-3/4" | | | 2.750 | 2.362 | | | |
| 55778 57778 | 19/64" X 3-1/2" | 0.630 | 0.197 | 3.500 | 2.834 | 0.224 | 0.216 | 0.299 |
| 55785 57785 | 19/64" X 5" | | | 5.000 | 3.425 | | | |

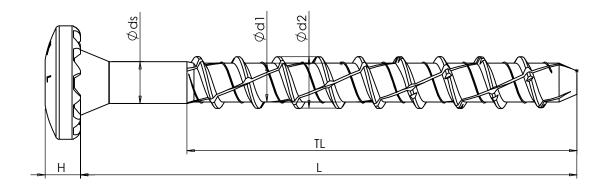

Dimensions are in inches without any manufacturing tollerances! Predrilling with a 1/4 inch diameter concrete drill bit required. Has a T-40 Star drive.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
Illinois Tool Works Inc. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF Illinois Tool Works Inc.

IS PROHIBITED.

| | NAME | DATE | Γ |
|-----------|-----------|---------------|---|
| DRAWN | S.Ruhmann | MARCH 27-2015 | |
| CHECKED | | | |
| ENG APPR. | | | |
| MFG APPR. | | | |
| Q.A. | | | |
| | | | |
| | | | L |



955 National Parkway,Suite 95500 Schaumburg,IL 60173 USA

| DWG. N | 10. | | REV. |
|--------|----------------------|--------------|------|
| Sales | Support Caliburn XLS | crew | ı |
| | Caliburn XL 19/64 | SHEET 1 OF 1 | |